



# Diaphragm Type Direct-Activated Pressure Reducing Valve

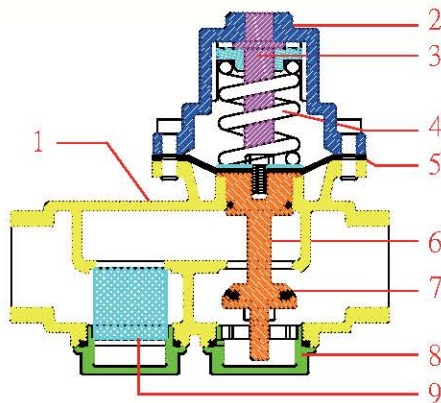

- ▲ Use for Normal Water
- ▲ Temperature : 0 °C ~ 60 °C
- ▲ Adjusting Range :  
1 kgf/cm<sup>2</sup> ~ 3 kgf/cm<sup>2</sup>
- ▲ Testing Pressure : 24 kgf/cm<sup>2</sup>
- ▲ Max. Pressure for use : 16 kgf/cm<sup>2</sup>

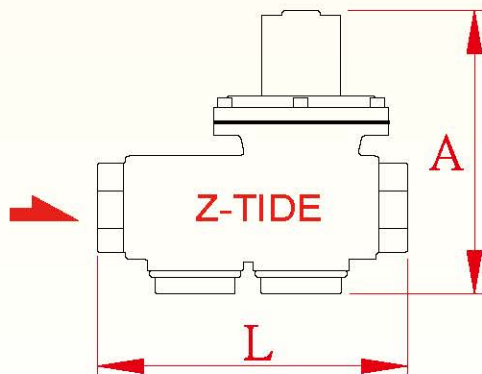

No.	Part Name	Material
1	Main Body	Bronze / SUS
2	Spring Cover	Plastic Steel
3	Adjusting Bolt	Brass / SUS
4	Spring	Spring Steel
5	Diaphragm	EPDM
6	Shaft	Brass / SUS
7	Sealing	NBR
8	Cover	Brass / SUS
9	Filter	SUS

		Thread End			
No.		RDST-20	RDST-25	RDST-40	RDST-50
Size	in	¾"	1"	1½"	2"
	mm	20	25	40	50
L (mm)		114	137	165	185
A (mm)		131	135	195	195